

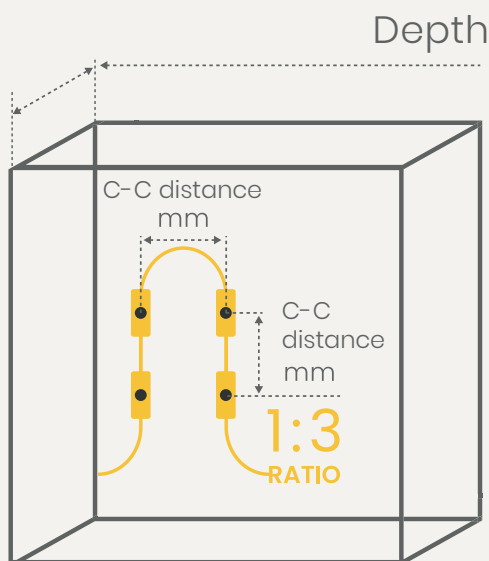





Teleline Series

Designed for Light Boxes



RECOMMENDED LAYOUT/CENTRE-TO-CENTRE DISTANCE, MM

PRODUCT/DEPTH, mm	60	80	100	120	140	160	180	200
KM-T0-W 0,5W	150							
KM-T1-W 1,2W		180						
KM-T2-W 2W		200	300					
KM-T4-W 4W				360	420	480	500	500
KM-T7-W 7W							500	500

*The result may vary based on face material and application. Please contact our team member to receive best recommendations.

	SERIES	VOLTAGE	CONSUMPTION	LUMENS	CCT	PROTECTION	BEAM ANGLE	MODULE CENTER-CENTER
	KM-T0-W 0,5W	12 VDC	0,50 W	55 lm	6500 K	IP67	175°	180 mm
	KM-T1-W 1,2W	12 VDC	1,20 W	120lm	6500 K	IP67	175°	200 mm
	KM-T2-W 2W	12 VDC	2,00 W	200 lm	6500 K	IP67	175°	300 mm
	KM-T4-W 4W	12 VDC	4,00 W	380 lm	6500 K	IP67	175°	500 mm
	KM-T7-W 7W	24 VDC	7,00 W	811 lm	6500 K	IP67	175°	500 mm

KAISEN



Designed for Light boxes. KAISEN D25 OPTICS is unique optics for lightboxes that allows using modules with 1:3 depth to spacing ratio between modules centers.



KAISEN D25 OPTICS with super wide 175° lens allows to achieve: **UP TO 4 TIMES faster installation.** UP TO 4 TIMES less modules required per sq.m. **UP TO 2 TIMES less illumination cost per sq.m.**



Thicker housing, thicker cables, thicker PCB, bigger LED chip. Everything you need to have full 7 year warranty.