

OUTDOOR METAL POWER SUPPLIES

KAISEN

KPS-V12-20W67-5Y-SM



IP67

DUST AND WATER
PROTECTED



OVERHEAT PROTECTION



5 YEAR EXTENDED
WARRANTY



OVER VOLTAGE
PROTECTION



SHORT CIRCUIT
PROTECTION




50 000 h

LIFETIME
50 000H



MINIMIZED
DEFECTIVE RATE

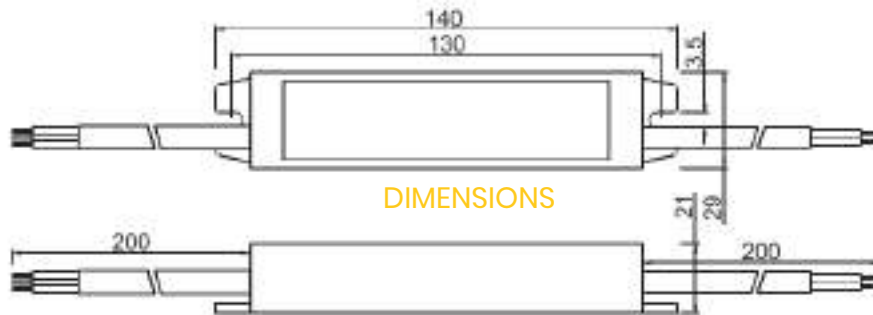

DIMENSIONS

TECHNICAL INFORMATION

Output Voltage	12V	24V
Rated Current	2A	1A
Rated Power	20 W	20 W
Ripple & Noise (max.)	< 400 mVp-p	< 100 mVp-p
Setup, Rise Time	1500 ms/230 VAC	1500 ms/230 VAC

STORAGE AND OPERATING CONDITIONS

Working Temp.	-30°C~50°C
Working Humidity	20°C~95%RH
Storage Temp.	-40°C~80°C
Storage Humidity	10°C~95%RH

PACKAGING

Product Dimension	140 x 29 x 21 mm
Products Net Weight	145 g
PCS/Carton (QTY)	100 PCS
Master Carton Size	390 x 390 x 210 mm
G. Weight/Carton	17 kg

Input Voltage	Input Frequency	Efficiency (Typ.)	Input Current
185 - 250 V	50/60 Hz	85 %	230 V : 0,18 A max.