PRISM P2

Ideal solution for channel letters with a depth of 80 - 120 mm and light boxes with enhanced brightness.

Due to professional optics directs more light to the surface of illuminated signs.

Cost-effective solution to achieve more brightness at reasonable price.

Various color solutions available 6500K



Specially designed for:

- Channel letters
- Light boxes wih enchanced brightness
- Recommended installation depth 80-120 mm


Features:

- Special optics designed for channel letters
- Compact size
- Efficiency up to 115 lm/W
- Maximum Tj temperature <80 °C
- LM80 international certificate for LEDs
- V1 fire protection level
- High protection level of IP66
- Light decay < 30% after 50,000 hrs
- 5 years warranty







Dimensions

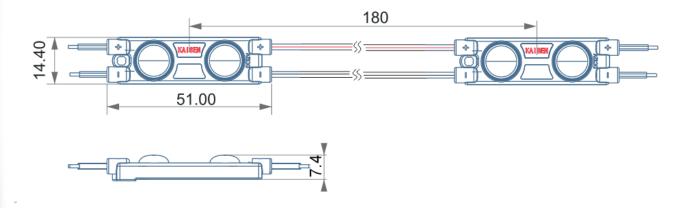

Light distribution graph





Technical information

Colors available :	\bigcirc
Power	0,72 W
Light output	83 lm
LED type	
Input	12VDC
Color temperature	○ 6500 K
Beam angle	165°
Protection level	IP 66
Center-to-Center distance	180 mm
Working temperature	-30 +50 ℃

Packing information

Packing type	Chain	Package	Box
Quantity	20 pcs	200 pcs	2400 pcs
Weight	0,16 kg	1,6 kg	19 kg

www.kaisenelectric.com